

Targha digital



COMPATIBLE SYSTEMS



Slimline entry panels

The Targha digital entry panel has set the standard for functionality and style for many years. Easy to install with a classic design, Targha has been the choice of more door entry systems than any other. Available as surface or flush mounted, the very low profile of only 28mm and backlit LED buttons allow the Targha to blend in with any style of building, day or night.

- Backlit LED buttons and display
- Anodised aluminium construction
- IP54 rated



ANSADOR

Ansador Ltd. 4 River Reach, Gartons Way, London. SW11 3SX
Tel: 020 7228 7777 Fax: 020 7924 2376 Sales@ansador.co.uk

perfect in any situation

The sleek design and backlit buttons will suit any application where style, simplicity and reliability are required. Panels can be mounted either side by side or in a column depending on the area available, or clients preference. For added security, the backlit keypad can provide up to 2000 user entry codes.



HBP-T Surface mounting






Digital flexibility and features

The 18 button backlit keypad allows for the sending of call codes, service codes and alpha numeric user calls using dedicated buttons. Up and down scroll controls enable browsing of menu or address functions, whilst keys are also provided for porter call and trades access if required. An in built RS 485 port can be connected to a PC or other units to enable the transfer of data (names, messages and codes). The back lit LCD display has adjustable character sizes and can be used for a number of information display options.

camera angle adjustment

The HAV (monochrome) and HAVC (colour) camera units allow for an 11 degree adjustment angle on both vertical and horizontal planes. The standard viewing area is 530mm(v) x 710mm (h) providing an extensive viewing area for visitor recognition. For ease of installation, terminals to connect either traditional co-axial or twisted pair cable are provided to carry the video signal.

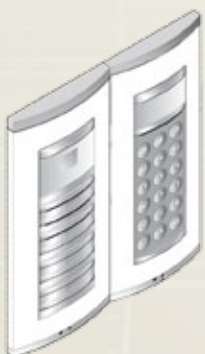

dimensions per housing

	L (mm)	W (mm)	D (mm)
Surface mounted	207	99	28
Back box dimensions	193	90	51.5